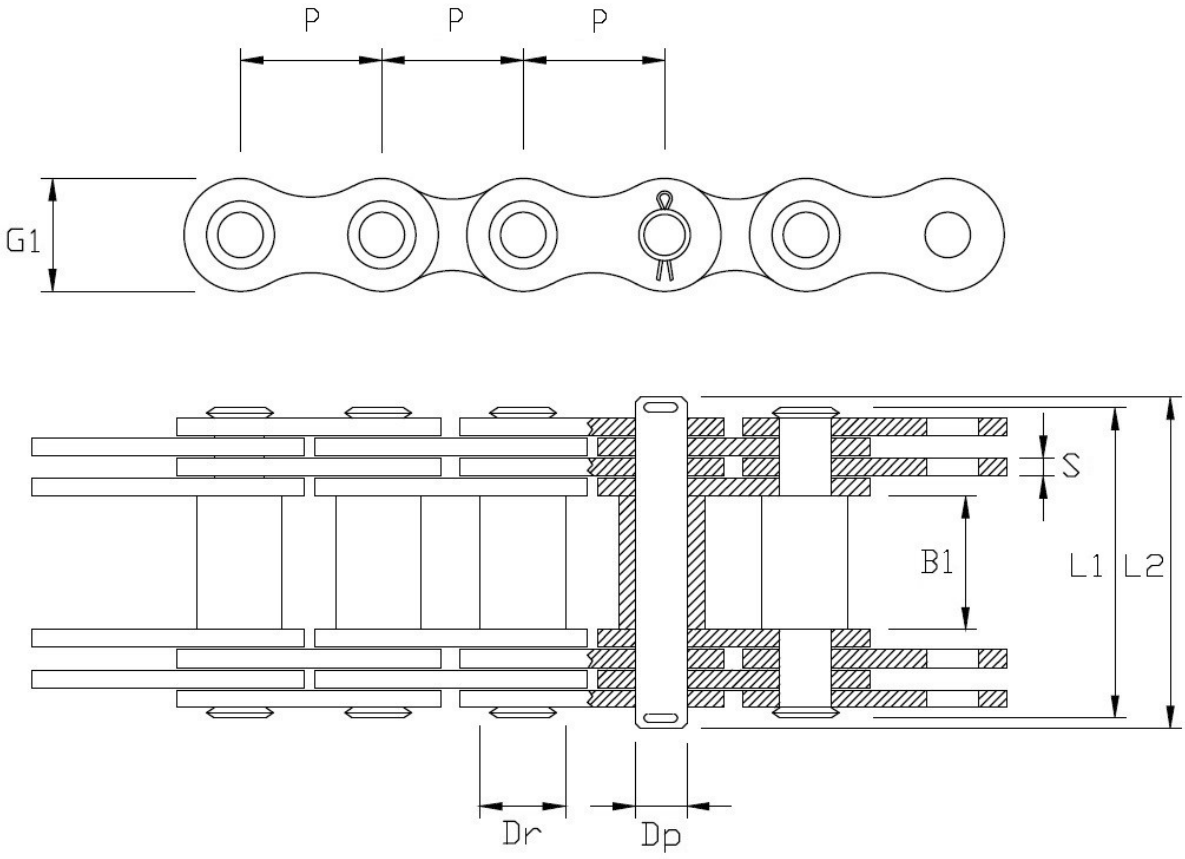

Riferimento catena	Dati tecnici

Rif. ISO N°	Codice AS Nord	Passo [mm]	Larghezza interna [mm] MIN	Ø Rullo [mm] MAX	Ø Perno [mm] MAX	Spessore piastre [mm]	Lunghezza perno ribadito [mm]	Altezza piastra [mm]	Lunghezza perno non ribadito [mm]	Numero di piaste per attacco	Carico di rottura [kN] MIN	Peso [kg/m]
		P	B1	Dr	Dp	S	L1	G1	L2	X	FB	q
-	DG 25	25,0	18,0	10,0	8,0	3,00	36,0	18,0	42,0	2	25	1,75
-	DG 25K	25,0	18,0	10,0	8,0	3,00	36,0	18,0	42,0	2	50	1,75
-	DG 30	30,0	20,0	11,0	9,0	3,00	51,0	20,0	58,0	4	40	3,40
-	DG 30K	30,0	20,0	11,0	9,0	3,00	51,0	20,0	58,0	4	70	3,40
-	DG 35	35,0	22,0	12,0	10,0	3,00	53,0	26,0	61,0	4	60	4,50
-	DG 35K	35,0	22,0	12,0	10,0	3,00	53,0	26,0	61,0	4	90	4,50
-	DG 40	40,0	25,0	14,0	12,0	3,00	58,0	30,0	66,0	4	80	4,70
-	DG 40K	40,0	25,0	14,0	12,0	3,00	58,0	30,0	66,0	4	110	4,70
-	DG 45	45,0	30,0	17,0	14,0	3,00	63,0	35,0	70,0	4	100	6,40
-	DG 45K	45,0	30,0	17,0	14,0	3,00	63,0	35,0	70,0	4	140	6,40

CATENE FLEYER
GALLE CON RONDELLA

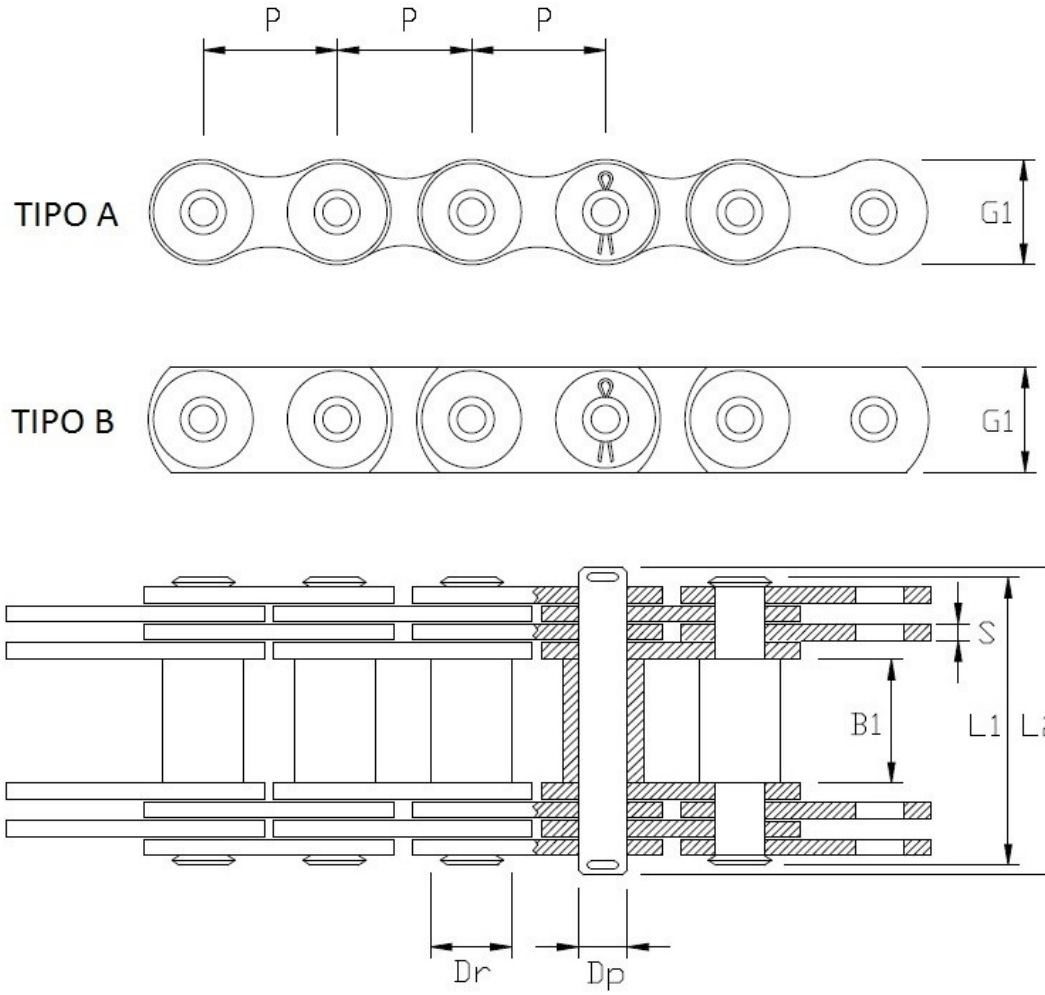

Riferimento catena	Dati tecnici

Rif. ISO N°	Codice AS Nord	Passo [mm]	Larghezza interna [mm] MIN	Ø Rullo [mm] MAX	Ø Perno [mm] MAX	Spessore piastre [mm]	Lunghezza perno ribadito [mm]	Altezza piastra [mm]	Lunghezza perno non ribadito [mm]	Numero di piaste per attacco	Carico di rottura [kN] MIN	Peso [kg/m]	Tipo
		P	B1	Dr	Dp	S	L1	G1	L2	X	FB	q	
-	DG 50	50,0	35,0	22,0	18,0	4,5	90,0	38,0	97,0	4	150	10,6	A
-	DG 55	55,0	40,0	24,0	21,0	6,0	108,0	40,0	115,0	4	200	15,5	A
-	DG 60	60,0	45,0	26,0	23,0	6,0	114,0	45,0	120,0	4	250	18,0	A
-	DG 70	70,0	50,0	32,0	28,0	6,0	148,0	55,0	157,0	6	375	33,5	B
-	DG 80	80,0	60,0	36,0	32,0	6,0	159,0	60,0	171,0	6	500	38,2	B
-	DG 90	90,0	70,0	40,0	36,0	7,0	184,0	70,0	200,0	6	750	53,0	B
-	DG 100	100,0	80,0	45,0	40,0	7,0	224,0	80,0	239,0	8	1000	76,6	B
-	DG 110	110,0	90,0	50,0	45,0	7,0	236,0	90,0	251,0	8	1250	90,0	B
-	DG 110E	110,0	80,0	58,0	50,0	8,0	236,0	100,0	250,0	8	1500	103,0	B
-	DG 120	120,0	100,0	55,0	50,0	8,0	262,0	100,0	277,0	8	1500	112,0	B

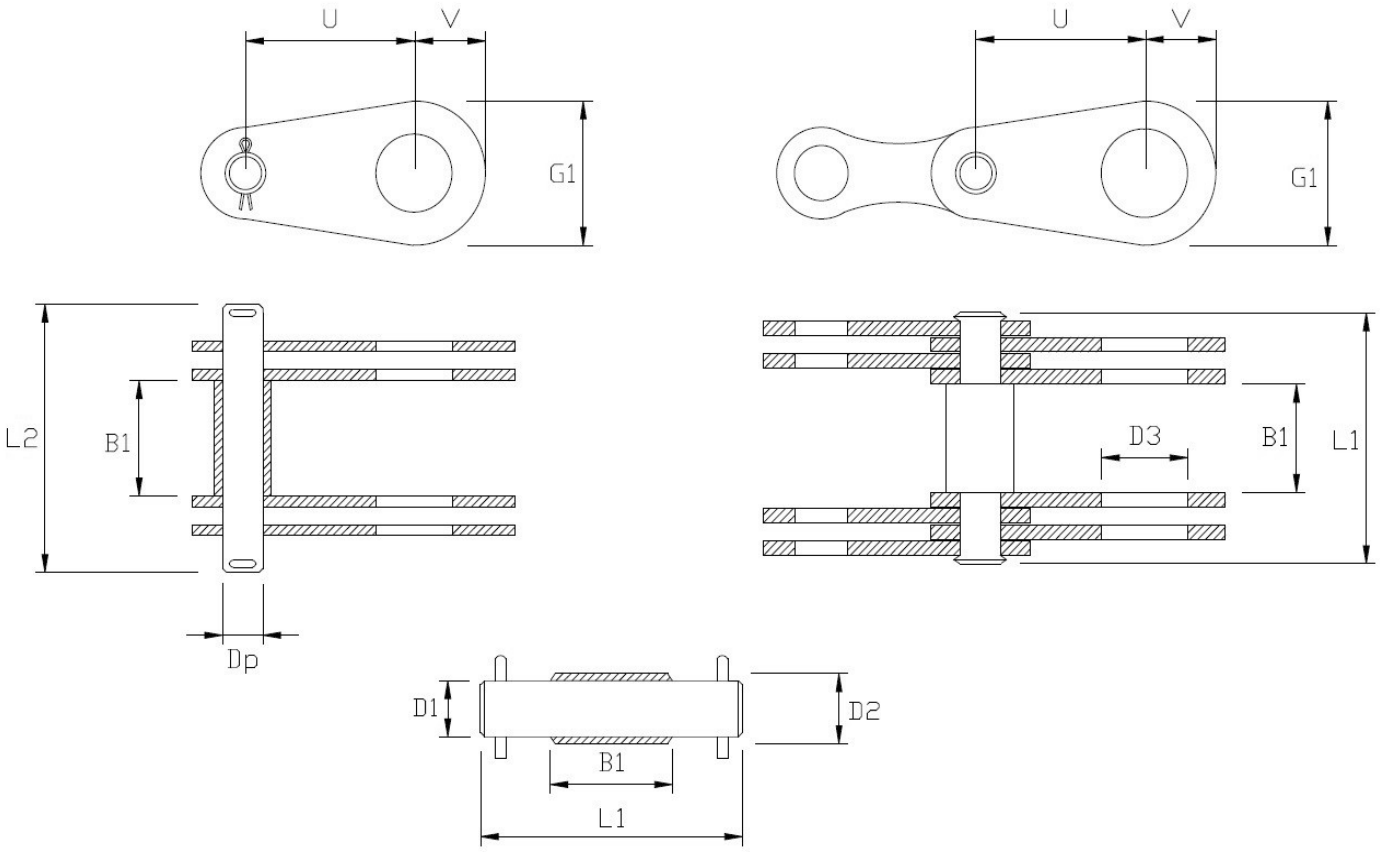

Riferimento catena	Dati tecnici

Rif. ISO N°	Codice AS Nord	Passo [mm]	Larghezza interna [mm] MIN	Ø Perno [mm] MAX	Ø Rullo [mm] MAX	Diametro foro [mm]	Lunghezza perno ribadito [mm]	Altezza piastra [mm]	Lunghezza perno non ribadito [mm]	Numero di piaste per attacco	Interasse 1 [mm]	Interasse 2 [mm]
		P	B1	D1	D2	D3	L1	G1	L2	X	U	V
-	DG 25	25,0	18,0	8,0	10,0	12,0	36,0	25,0	42,0	2	30,0	15,0
-	DG 25K	25,0	18,0	8,0	10,0	12,0	36,0	25,0	42,0	2	30,0	15,0
-	DG 30	30,0	20,0	9,0	11,0	14,0	51,0	30,0	58,0	4	40,0	18,0
-	DG 30K	30,0	20,0	9,0	11,0	14,0	51,0	30,0	58,0	4	40,0	18,0
-	DG 35	35,0	22,0	10,0	12,0	16,0	53,0	35,0	61,0	4	45,0	21,0
-	DG 35K	35,0	22,0	10,0	12,0	16,0	53,0	35,0	61,0	4	45,0	21,0
-	DG 40	40,0	25,0	12,0	14,0	18,0	58,0	40,0	66,0	4	50,0	24,0
-	DG 40K	40,0	25,0	12,0	14,0	18,0	58,0	40,0	66,0	4	50,0	24,0
-	DG 45	45,0	30,0	14,0	17,0	22,0	63,0	45,0	70,0	4	55,0	27,0
-	DG 45K	45,0	30,0	14,0	17,0	22,0	63,0	45,0	70,0	4	55,0	27,0

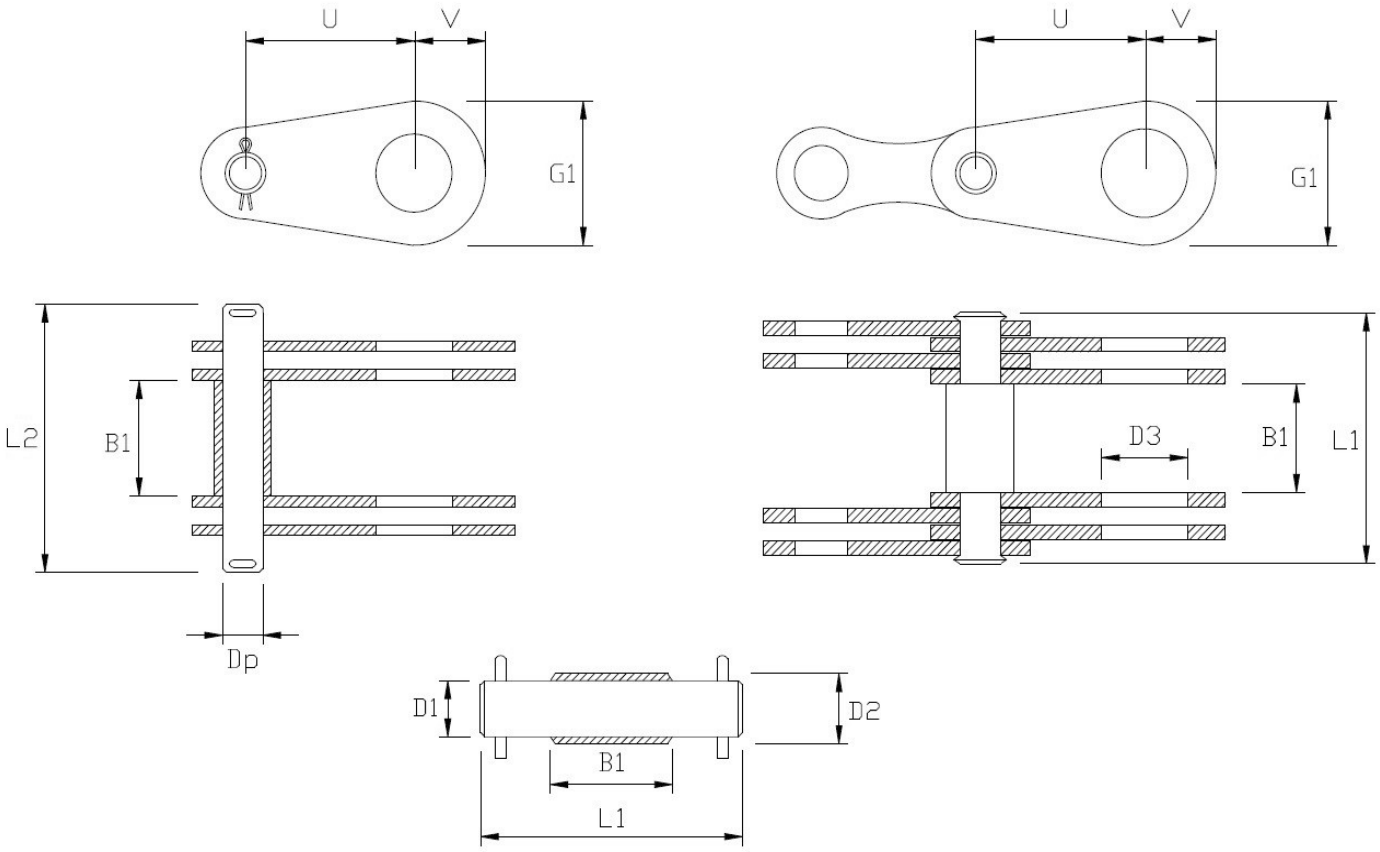

Riferimento catena		Dati tecnici										
Rif. ISO N°	Codice AS Nord	Passo [mm]	Larghezza interna [mm] MIN	Ø Perno [mm] MAX	Ø Rullo [mm] MAX	Diametro foro [mm]	Lunghezza perno ribadito [mm]	Altezza piastra [mm]	Lunghezza perno non ribadito [mm]	Numero di piaste per attacco	Interasse 1 [mm]	Interasse 2 [mm]
		P	B1	D1	D2	D3	L1	G1	L2	X	U	V
-	DG 50	50,0	35,0	22,0	18,0	26,0	90,0	50,0	97,0	4	60,0	30,0
-	DG 55	55,0	40,0	24,0	21,0	32,0	108,0	55,0	115,0	4	65,0	33,0
-	DG 60	60,0	45,0	26,0	23,0	36,0	114,0	60,0	120,0	4	70,0	36,0
-	DG 70	70,0	50,0	32,0	28,0	40,0	148,0	70,0	157,0	6	85,0	42,0
-	DG 80	80,0	60,0	36,0	32,0	50,0	159,0	85,0	171,0	6	100,0	51,0
-	DG 90	90,0	70,0	40,0	36,0	60,0	184,0	100,0	200,0	6	120,0	60,0
-	DG 100	100,0	80,0	45,0	40,0	70,0	224,0	120,0	239,0	8	140,0	72,0
-	DG 110	110,0	90,0	50,0	45,0	80,0	236,0	140,0	251,0	8	160,0	84,0
-	DG 120	120,0	100,0	55,0	50,0	90,0	262,0	160,0	277,0	8	180,0	96,0